




LC-XGA982U

Boardroom Projector

XGA Data/Video Portable

KEY FEATURES

- Projects true XGA / MAC19: 1024 X 768 pixels with all the clarity of 3 panel LCD technology.
- 1300 ANSI Lumens Brightness. Up to a 300" diagonal (20' wide) picture.
- Compact 14.6 lb. Design fits easily into airline overhead compartments.
- Smart data compression / expansion, and video scaling technology.
- Displays higher resolutions with panning, or smart compression.
- Displays lower resolutions normal, or smart expanded.
- 160 MHz dot clock, for compatibility with many workstations.
- Wireless remote with mouse control and power zoom and focus.
- 16 Increment Digital Zoom magnifies the image, not the pixels
- 3 Year* Projector Warranty! 6 Month* Lamp Warranty!

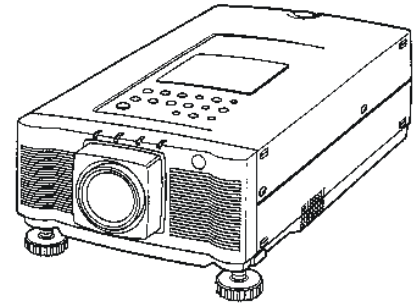

OTHER IMPORTANT FEATURES

- UHP (Ultra High Performance) long-life 150 Watt lamp.
- Composite and S-Video Input in NTSC, PAL, SECAM / NTSC 4.43 / PAL-M .
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- International Power: 100~240V AC, 50 / 60 Hz (automatic).
- Included Accessories – Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. MAC Adapter. Wireless Remote Control With Mouse & Batteries (AA x 2). Mouse cables for PS/2, Serial Port, ADB Port. Dust Cover.
- Optional Accessories – Replacement Lamp. MAC Monitor Cable. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable. Long Throw Lenses (require installation by a qualified technician).

SPECIFICATIONS:

Screen Brightness 1300 ANSI Lumens
 Illumination Uniformity 85%
 Size of Color Palette 16.7 Million
 Contrast Ratio 300:1 (ANSI 100:1)
 Horizontal Resolution 800 TV Lines
 Projection Lamp 150 Watt UHP
 Estimated Lamp Life..... 2,000 Hrs.
 Recommended Lamp Replacement..... 1,000 Hrs
 Imaging System 1.3" PolySilicon TFT Panels x3
 Screen Pixels 1024 x 768
 Total Pixels 2,359,296 ((1024 x 768) x 3)
 Lens Type 1:1.3 ratio Power Zoom and Focus
 Lens Speed & Focal Length.. f:1.8~2.1; 1.91~2.48 in. (48.4~62.8mm)
 Lens Protection..... Auto Lens Retract
 Image Diagonal 30~300 in.
 Image Width 2.0 ~ 20 ft. (0.6 ~ 6.1 m.)
 Throw Distance 4.6 ~ 46.1 ft. (1.4 ~ 14.04 m.)
 Width-to-Throw Factor 1.78 ~ 2.3
 Front Elevation / Maximum Tilt up to 6° up (One Touch)
 Anti Keystone Preset Lens Offset, Ratio (T:B) 19:1
 Scanning Frequency Auto: H Sync. 15-100Hz; V Sync. 50-100Hz
 Dot Clock 160 MHz
 Image Orientation Normal, Reversed, Inverted
 Local Control Full Function
 Remote Control Wireless (IR x 1) & Mouse x 1
 Mouse Control Port 12 Pin DIN x 2
 RS-232 Control Port On mouse Control Port #2: 12 Pin DIN x 1
 Computer Native Resolution XGA/MAC19 (1024 x 768)
 Computer: Compatibility SXGA, XGA, SVGA, VGA & MAC
 Computer: Formats. 1280x1024, 1024x768, 832x624, 800x600, 640x480

Computer: Higher Resolution Displayed panned or Smart compressed
 Computer: Lower ResolutionDisplayed normal or Smart expanded
 Computer: Channels.....2
 Computer: Inputs..... HDB15 x 2
 Computer: Monitor Out HDB15 x1
 Computer: Audio In Stereo: MiniStereo x 2
 Video: Compatibility NTSC / PAL / SECAM / NTSC 4.43 / PAL-M
 Video: Formats Supported Normal 4:3 and Wide Screen 16:9
 Video: Image Sizing Video Scaling Technology
 Video: Channels 1
 Video: Inputs Composite: RCA x 1, S-Video x 1
 Video: OutputComposite: RCA x 1
 Video: Audio Input RCA x 2 (L&R)
 Audio AmplifierStereo: 2 Watts RMS each (L&R) 3 Watt peak
 Audio: Built In SpeakersStereo: 1.57 x 2.75 in. (4x7cm) x 2
 Audio: External Speaker OutputStereo: MiniStereo x 1
 Fan Noise Approximately 45 dB
 Size (H x W x D) 5.8x10.8x16.3 in. (145.5x272x412.5 mm.)
 Weight 14.6 lbs. (6.6 kg)
 Packaged Size (H x W x D) .. 12.5x15.9x22.2 in. (317x404x564 mm.)
 Packaged Weight 22.1 lbs. (10.0 kg)
 Power Requirements 100~120V / 200~240V AC, 50/60Hz
 Power Consumption / Heat 250 Watts / 854 BTU/hr.
 Power Cord 10' (3M) Type 3, Detachable
 Safety Compliance UL Listed
 User Maintenance Clean Air Filter, Replace Lamp
 Warranty Projector 3 Yr / 6000 Hr *(Parts & Labor to Correct Defects)
 Warranty Lamp 6 Mo/1000 Hr *(Pro-Rata Replacement of Failed Lamp)
 * Whichever occurs first

Specifications subject to change without notice. ©1999 Eiki International, Inc. Issued September 1, 1999,

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630, USA. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>